

MICROOFFICE

# QUADRIO II



## AT A GLANCE

Exterior dimensions:

2525mmW x 1944mmD x 2285mmH

Acoustic Rating:

36 dB

Finish:


Acoustic fabric, solid oak trims

Power:

Movement activated light and airflow

10A lead and 3-pin plug to standard GPO

MICROOFFICE  
**QUADRIO II**



**EFFICIENT VENTILATION SYSTEM**

Our highly efficient ventilation system keeps you comfortable while you work



**FLEXIBLE INTERIOR**

Its flexible design means you can opt for a stand-up table for quick meetings or comfortable seats encouraging long discussions.

**MAGNETIC LOCK**

The fittings are almost invisible yet ensure maximum seal and impermeability to noise. Even this seemingly tiny detail plays a major role in the excellent acoustic performance of the MICROOFFICE



**METICULOUS ATTENTION TO DETAIL**

From the design stage to production, our MICROOFFICE units are under the watchful eyes of a team of specialists in acoustics, carpentry and upholstery

**EXCEPTIONAL WORKMANSHIP**

We like it when things fit together. That's why we opted for a minimalistic, functional design with precise technical details. Our products are made with love in the Czech Republic



**98% NATURAL MATERIALS**

We place a strong value on using natural materials. Wood, glass and a variety of wool blends form the basis for all our MICROOFFICE units

**TOP ACOUSTICS**

Solid wood, acoustic foam, double glazing and upholstered paneling all make the MICROOFFICE a quiet refuge from the hustle and bustle of the office. The acoustics inside the unit remain calm and pleasant thanks to optimal placement of sound-absorbing materials. The outside upholstery also absorbs sound in the surrounding area



**EXCLUSIVE MATERIALS**

We choose our materials with care and perform long-term testing to ensure absolute quality



**REPLACE INDIVIDUAL PANELS**

Whether changing your corporate colors or just looking to brighten up the office, you can change the color scheme of your MICROOFFICE by switching out the upholstered paneling for another color. Replacing stained or damaged upholstery is just as easy.">Replace individual panels

**MOTION SENSOR**

The motion sensor means the MICROOFFICE only switches on when actively in use. The ventilation and lights go on when you come in and off when you go out

# MICROOFFICE QUADRIO II

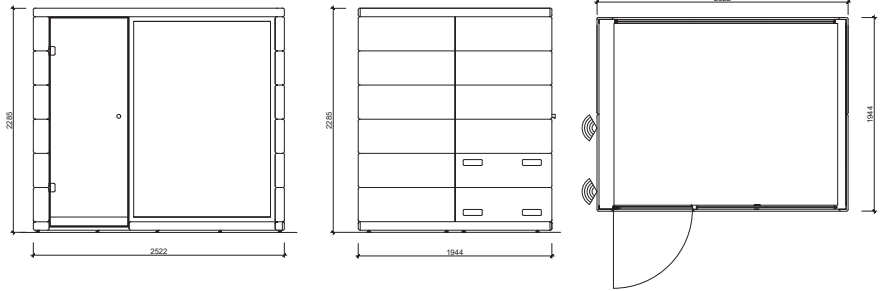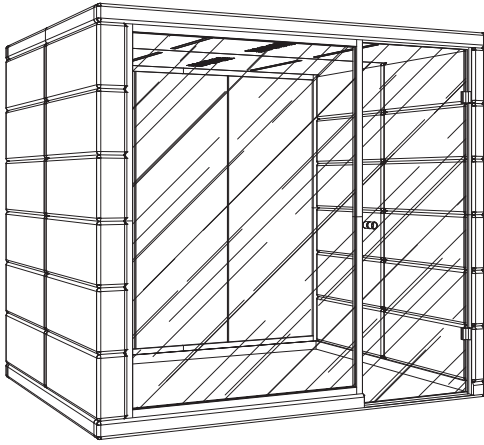

## FABRIC SWATCHES

### Woolland



#### materials

70% wool, 30% polyamide

**weight** 400 g/m<sup>2</sup>

**width** 140 cm

**abrasion resistance**  
> 100,000

### Blazer



#### materials

70% virgin wool

**weight** 460 g/m<sup>2</sup>

**width** 140 cm

**abrasion resistance**  
> 50,000

### Synergy



#### materials

95% virgin wool, 5% polyamide

**weight** 400 g/m<sup>2</sup>

**width** 140 cm

**abrasion resistance**  
> 100,000

\*The colours displayed above are recommended choices. Please enquire for our comprehensive collection.

## TECHNICAL DETAILS

exterior dimensions	2522 × 1944 × 2285 mm
interior dimensions	2246 × 1824 × 2128 mm
weight	750 kg
door dimensions	793 × 2143 mm
door opening / clear dimensions	777 × 2127 mm
door opens	left
glass doors	sound-insulating glass
glass walls	sound-insulating glass
solid walls	sound-absorbing sandwich panel with acoustic insulation
ceiling	sound-absorbing sandwich panel with acoustic insulation
flooring	sound-absorbing sandwich panel with acoustic insulation, carpet (anthracite grey)
glass wall frame and door handle	solid oak/black varnish
sound attenuation	speech level reduction $D_{s,a} = 36$ dB (class A)*1
ventilation	automatic*2/manual with control panel, air flow 347 m <sup>3</sup> /h*3
lighting	LED, chromaticity temperature 4200 K
energy consumption	consumption in operation 40 W, consumption in standby 1 W
power for MICROOFFICE	220–240 V, 50/60 Hz, 10 A
standard equipment	electric socket (2x), USB (2x), Data (1x), motion sensor, desk, lamp, ventilation
optional equipment	refer to the pricelist
color options	decorative fabric (refer to swatches)
certification	CE

\*1 ISO 23351-1:2020 – Acoustics – Measurement of speech level reduction of furniture ensembles and enclosures – Part 1: Laboratory method.

\*2 The fan speed is automatically regulated depending on the temperature difference inside and outside the MICROOFFICE.

\*3 It is highly recommended to keep at least 15 cm space on the left side where the ventilation inlet is. Please keep also 30 cm above the MICROOFFICE.





## CONTACT

### Showroom

5/364 Kent Street  
SYDNEY NSW 2000

+61 2 9854 6800  
sales@aspeneriors.com.au  
aspeneriors.com.au

### Office & Manufacturing

#### Sydney

53 Holbeche Road, Arndell  
Park NSW 2148  
+61 2 9854 6800

#### Armidale

65 Seaton Street, Armidale  
NSW 2350  
+61 2 6776 6100

#### Melbourne

530 Little Collins Street,  
Melbourne VIC 3000  
+61 3 9909 7494

#### Brisbane

477 Boundary Street  
Spring Hill Brisbane QLD 4000  
+61 7 3085 7456



[www.linkedin.com/company/aspeneriors/](https://www.linkedin.com/company/aspeneriors/)